





COLOR SWATCHES
detailed item info on back



Luminous

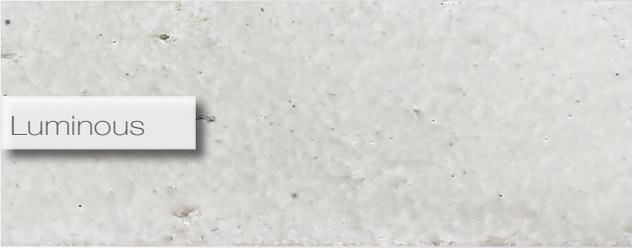

*example of expected variation

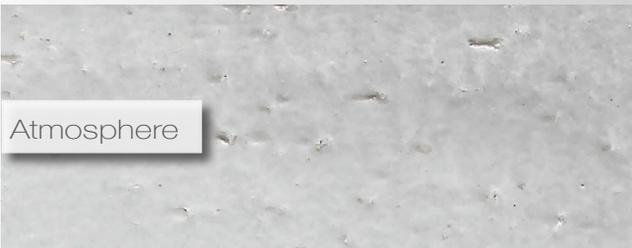

Atmosphere



*example of expected variation



Promontory



*example of expected variation



Some forms of construction are so pervasive that even when we are dazzled by the workmanship, we comprehend them in a totalitarian way with immediacy.

Masonry is one such form of artisanal craftsmanship that speaks to us in a profound way. A perfect mixture of mathematical perfection in the finished work mingles with the organic imperfections of the material itself.

We tried to capture the essence of decorative brickwork in our Ashlar collection by pairing multiple decorative formats with an organically flowing fume glaze. Bring a sense of good old fashioned craftsmanship with a modern twist to your next project with Ashlar

INSTALLATION & MAINTENANCE

- ◆ Extruded brick tile is suitable for all interior wall or ceiling applications including wet areas. Not suitable for demanding environments such as steam showers
- ◆ All products should be inspected prior to installation for any defects or unacceptable color/shade variation. Claims will not be accepted after installation
- ◆ Proper substrates, preparation and installation materials are required for a successful installation. For reference please see the TCNA 09300 Tile Handbook
- ◆ Fine aggregate sanded grouts are recommended for extruded brick wall tiles due to the larger joint width.
- ◆ Ensure all grout haze is buffed off before 48 hours have elapsed after installation
- ◆ Glazed tile should not be treated with a sealer for any reason
- ◆ To clean glazed brick tile, use a damp sponge with warm water. For heavy cleaning, use a non abrasive cleaner with a damp sponge
- ◆ Further warranty, best practices, care and maintenance details can be found on our website




TECHNICAL SPECIFICATIONS

Technical Characteristics	ASTM Test Result	ASTM/ANSI Test Method
Water Absorption %	<3%	A 187.1
Dimensionality (flatness, warpage, straightness, etc.)	premium grade conformance	A 187.1 ISO 10545-2
Thermal Shock & Crazeing Resistance	Pass	A 187.1 ISO 10545-9/11
Resistance to Stains, chemicals acids, etc.	Pass	ISO 10545-13/14
Frost Resistance	Pass	C 1026

PACKAGING

Size	PC/CTN	Sqft/ctn (Sqm/ctn)	Carton/Pallet	Sqft/plt (Sqm/plt)	Lbs/ctn (Kgs/ctn)	Lbs/plt (Kgs/plt)
2.5x9.5" (60x240)	30	5.14 (0.48)	90	462.60 (42.98)	22.00 (9.98)	1,980.00 (898.20)
3.5x6.5x2.5" (89x169x60)	16	2.81 (0.26)	32	89.83 (8.35)	12.00 (5.44)	388.00 (176.00)

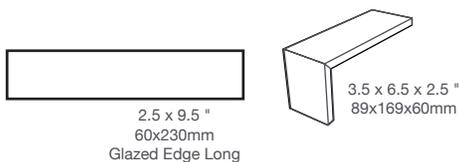

V2
Moderate
Variation


Trim formats available in all colors including blends. For packaging info please visit our website

LUMINOUS



ASHL29LU

ATMOSPHERE

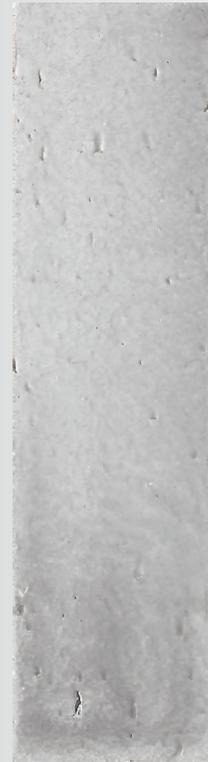

ASHL29AT

PROMONTORY



ASHL29PR



*Tiles are glazed at random with accent color. For best results employ blending from different cartons during installation

